


DHI-PHGOA6-EH

Outdoor Fixed LED

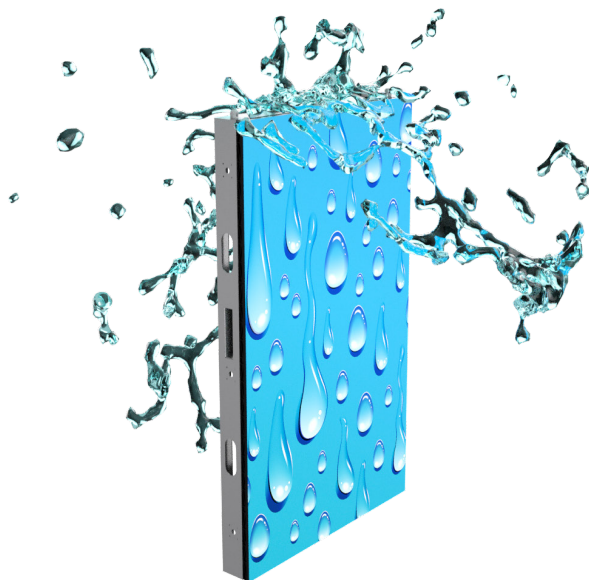

Features :

- Super thin and light design: 98mm and 15.3kg/panel.
- Support front&rear installation and maintenance.
- Module adopts the triple waterproof design of imitation automobile door-type double-layer negative pressure precision aging waterproof ring.
- Support wall mounting without steel structure to save cost.
- Adopt connection pin design for reliable signal and quick dismantling.



Technical Specification

Model

Model	DHI-PHGOA6-EH
-------	---------------

Parameters

Pixel Pitch	6.667mm
Pixel Configuration	1R1G1B
LED Type	SMD2727
Brightness	≥5500 cd/m ²
Viewing Angle	H140°/V100°
Pixel Density	22,500 dot/m ²
Module Size	320x320 mm
Cabinet Size	640mmx960mm
Cabinet Weight	15.3kg
Gray Level	65536
Area	0.6144m ²
Material	Aluminum Alloy
Aspect Ratio	2:3

Ingress Protection	Front IP65/Rear IP55
Operating Temperature/ Humidity	-20°C~+40°C/10~90%RH
Pixels per Cabinet	96x144 pixels
Processing Depth	16 bits
Brightness Control	Manual/Automatic
Contrast Ratio	4000:1
Frame Rate	50/60 Hz
Refresh Rate	≥3840 Hz
Input Voltage	220V AC
Input Power (max)	700W/m ²
Input Power (typical)	300W/m ²
Installation	Fixed
Maintenance Mode	Front&Rear Maintenance
Data Interconnection	CAT5 Cable (L≤100m), single mode fiber (L≤10km)