


Connect more modulators

Connecting of 2 or more modulators together

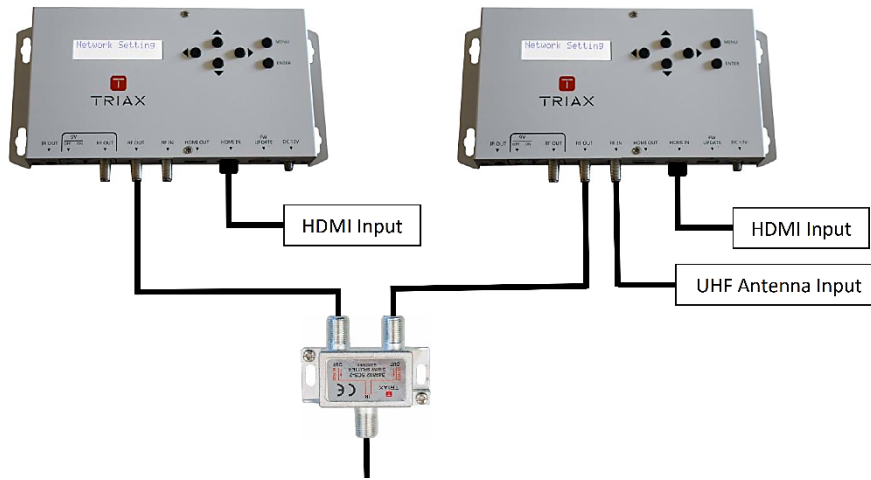

Output to TV distribution network

Two, or more modulators can be combined together and the signal can then be distributed over the TV distribution network.

There are a few parameters that have to be changed on the modulators to enable the TV's to see all the channels.

- Each modulator must have a different output channel/frequency.
- Each modulator must have a different Local Channel Number (LCN).
- Each modulator must have a different Service ID Number.

Note: if IR control is required, use RF2 out

