



# \*\* NEW Hooded VERSION VOYAGER VOICE GSM Intercom




- **Male or Female Spoken Voice**
- **Control 2 Gates or Doors**
- **IP55 Waterproof Housing**
- **5 Call Out Numbers**
- **200 Call In Numbers**
- **Automated Schedules**
- **Do Not Disturb Mode**
- **Back Light and Side Lights**
- **Downloadable Log**
- **Programming Security Code**
- **Free Installer & End User App**

Operating Bands	4G, 3G and 2G GSM bands
Power	12V DC 2 Amp (supplied)
Call Out Phone Numbers	5
Dial to Open users	200
Keypad Operation	10 x 4 Digit codes for any number of users. 24 x 7 Or Time and Day limited Codes Temporary Lifetime Code available Remove, List & Configure all codes
Method of programming.	SMS Text and Mobile Phone App
Method of operation.	- Press the intercom call panel - Dial to open (no call cost) and SMS text - Enter 4 digit pre configured Keypad code
Pulse Time	3 seconds (Configurable).
Gate open for fixed period	SMS command or App. Programmable time period. From a minute to many hours.
Security Settings	4 Digit security code can be applied to all SMS Text.
Number of Inputs	2
SMS Text on gate open/close	Control Phone or Phone 1
Gate Status	SMS text to query if gate open.
Keeps SIM on the network	Text sent by device to Control Phone or Phone 1, every 30 days to add credit.
Automatic Schedules for Output 1 or Output 2	10 schedules that can be specified by day and time. It can be specified with a limited lifetime if required.
Out of Hours Schedule Programmable.	



**\*\* NEW Hooded VERSION  
VOYAGER VOICE GSM Intercom**

**Keypad Unit - External Dimensions**

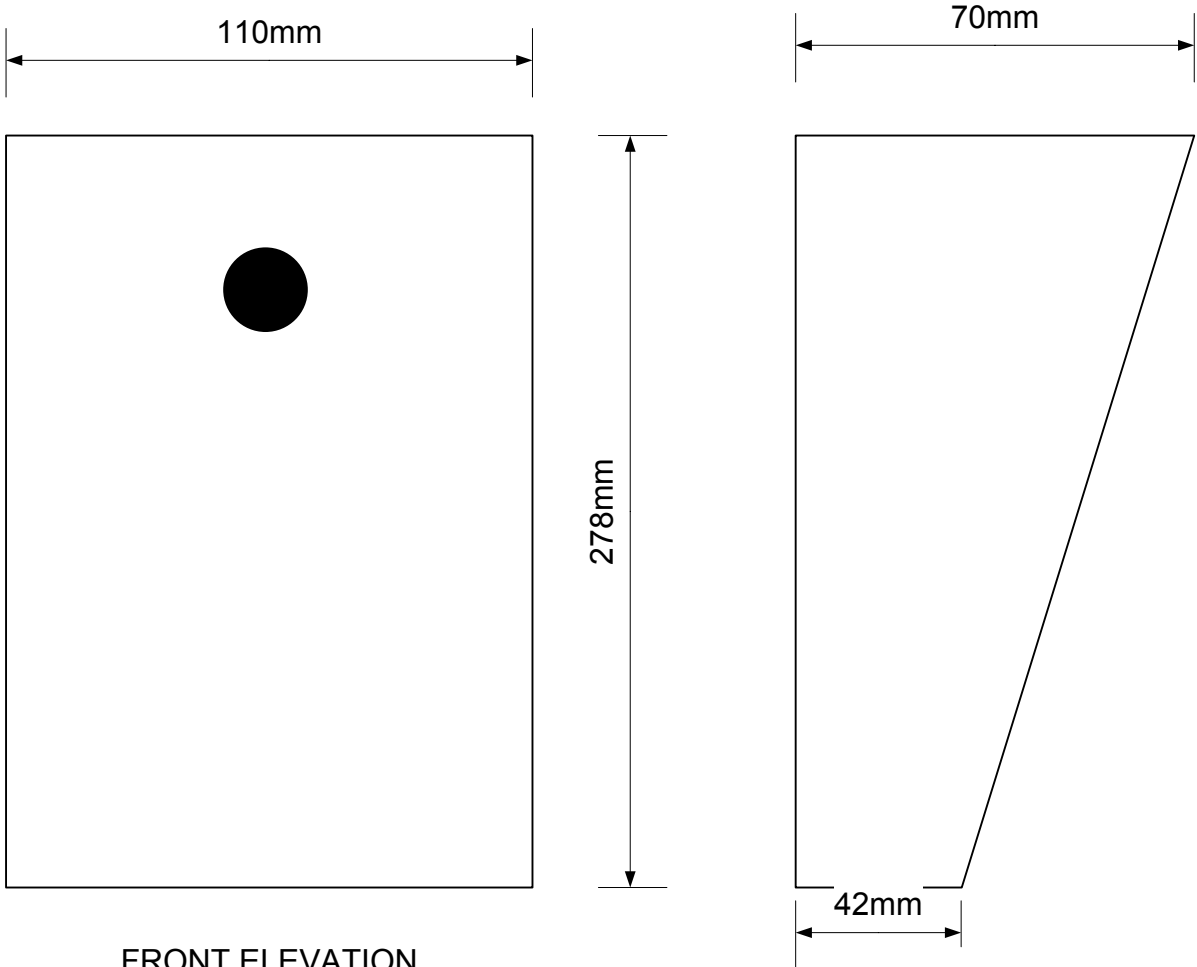

FRONT ELEVATION

SIDE ELEVATION




PLAN VIEW




**\*\* NEW Hooded VERSION  
VOYAGER VOICE GSM Intercom**

**No Keypad Unit—External Dimensions**

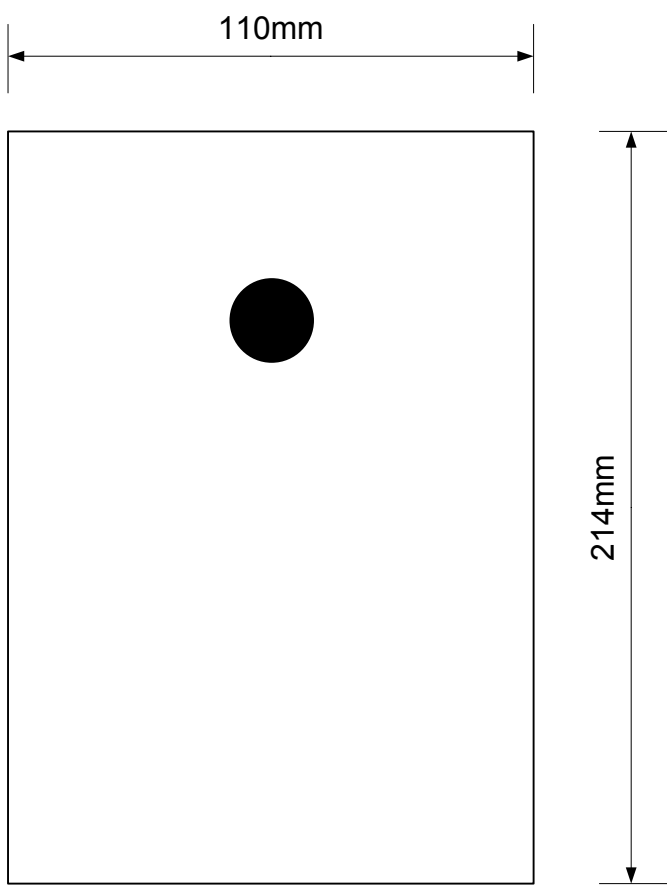

FRONT ELEVATION

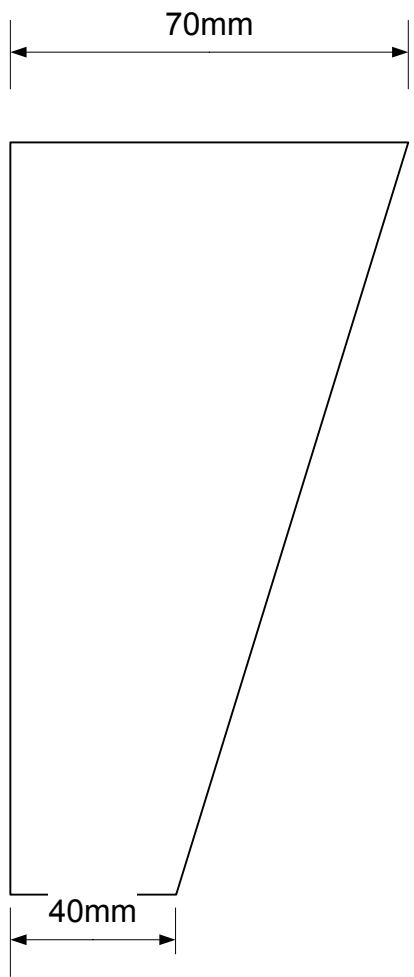

SIDE ELEVATION



PLAN VIEW